




: 5 . % -

8OWUDVRIW 5HFRYHU\ %ULGJH



3, 11, 1*

3, 1	'(6&5,37,21
	, Q S X V A A Q
	, Q S X V A A Q
	2 X W S X W A Q R G H
	2 X W S X W A W K R G H

) HDWXUHV
 ‡* OD V DVVLYY DWLSC F W L R Q
 ‡5HYHURD WDJH9
 ‡)RUZDUGUHQW
 ‡+LJXU&XUU&HDSW ELOLW\
 ‡'HVLJQRG XUIDRKS\$S/SOLF DWL R Q
 %HQHILWV
 ‡&DVH%-
 ‡7HUPLGROGHUHQH67'


0D[LPXP DWLQOQGOHFWEKBD OFWHULVWLFV

5DWLQVf &PELMOHWSHUQOQXUMKHU/SLHFLILHG
 6LQJOH SKDVH KQOIHZDVMUQGXFORVDSHEDSDFLWEXHUOROVWH


3DUDPHWHU	6\PEROV	: 5 . % -	8QLWV
0D[LPXP 5HSHWLWLYH 3HDN 5H5DU VH 9ROWDJH	9506		9
0D[LPXP 506 YROWDJH	9506		9
0D[LPXP '& %ORFNLQJ 9ROWDJH&			9
\$YHUDJH 5HFWLILHG 2XWSXW &.XUUHQW			\$
5HYHUVH 5HFRYHU\ 7LPH ,) \$,5 \$,55 \$	7UU		XV
3HDN)RUZDUG 6XUJH &XUUHQW PV 6LQJOH +DOI 6LQH :DYH 6XSHULPSRV,HC RQ 5DWHG /RDG -('(& 0HWKRG			\$
, WUDWROXVVLQBV W PV	, W		\$ 6
0D[LPX)RUZDUG WDW H\$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ f & DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$ f &			\$
7\SLFDO -XQFWLRQ &RVSDFLWDQ&MH			S)
2SHUDWLQJ DQG 6WRUDJH 7HPSW WDWXUH 5DQJHa			f &
1RWH0HDVX DMOG+] DQSSOLHHYGHURQVRD JH& ORXQWHG RQ JODVV HSR\ 3& E'R(DUG< ZLWKP) FRSSHU SDG			

: 5 . % -


5 \$ 7 , 1 * 6 \$ 1 ' & + \$ 5 \$ & 7 (5 , 6 7 , & 6 & 7 5 9 (6 X Q O H V V R W K H U Z L V H Q R W H G

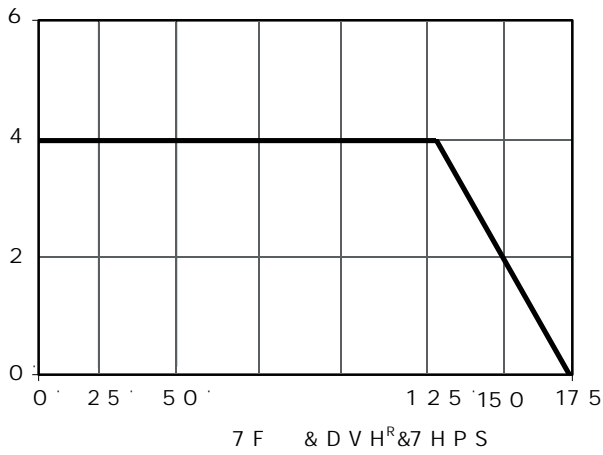

Current Derating Case

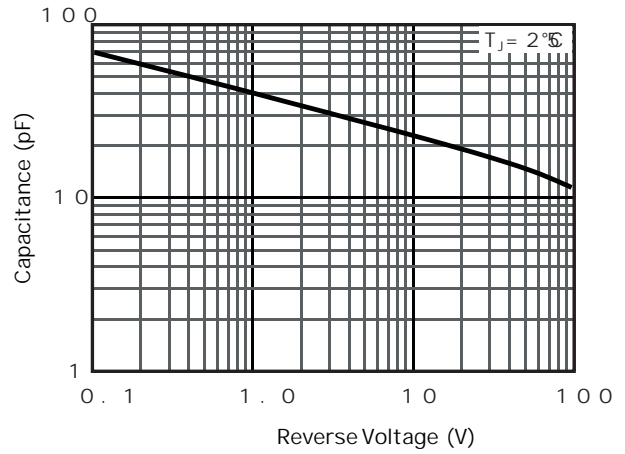

Typical Junction Capacitance

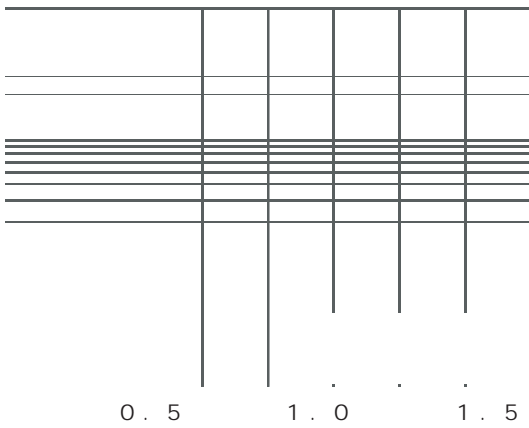

V_f Instantaneous vs. I_f Forward

Typical Forward Voltage

0
V_R Reverse Voltage (Volts)

Typical Reverse Current

KBJ

