

**DO-201AD**  
**TSA5S60**



Cathode   Anode

## Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

## Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes






## Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

Parameter		Symbol	Limit		Unit	
Maximum repetitive peak reverse voltage		VRRM	0		V	
Maximum average forward rectified current		IF(AV)			A	
Peak forward surge current 8.3 ms single half sine- wave superimposed on rated load per diode		IFSM	5		A	
Operating junction and storage temperature range		TJ, TSTG	- to +150		°C	
Typical thermal resistance per leg					°C/W	
Instantaneous forward voltage per diode		VF(1)	TYP.	MAX.	V	
	IF= A		TJ=25°C	0.		0.
	IF= A		TJ= 25°C	0.		-
	IF= A		TJ=25°C	0.		0.
IF= A	TJ=125°C	0.	-			
Instantaneous reverse current per diode at rated reverse voltage	TJ=25°C	IR(2)	-			
	TJ=125°C		-		mA	

Notes:

≡

## RATINGS AND CHARACTERISTICS CURVES

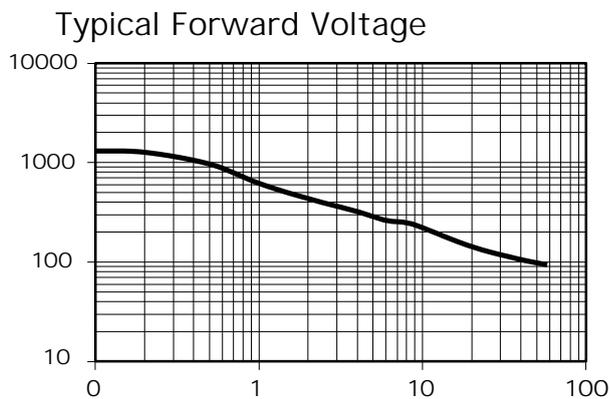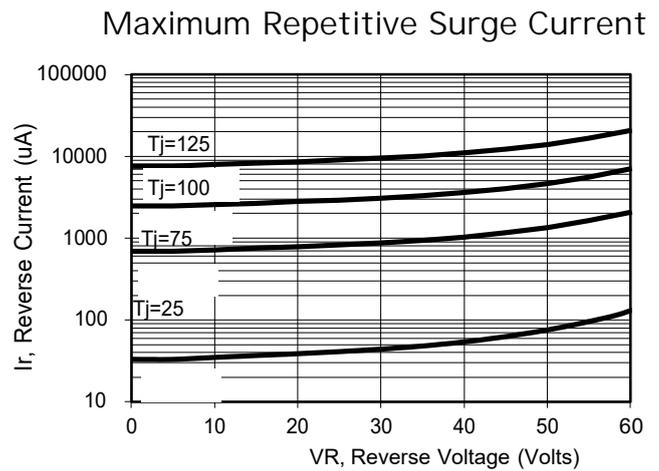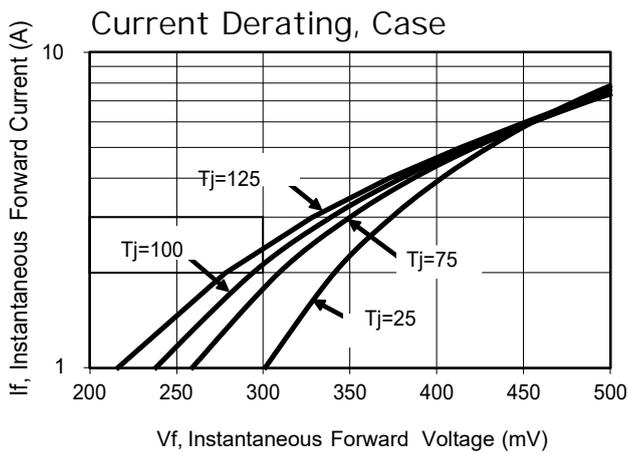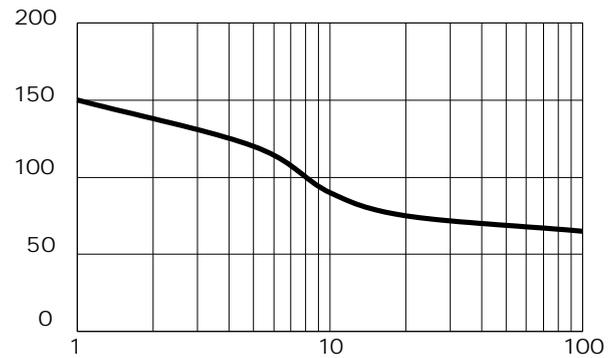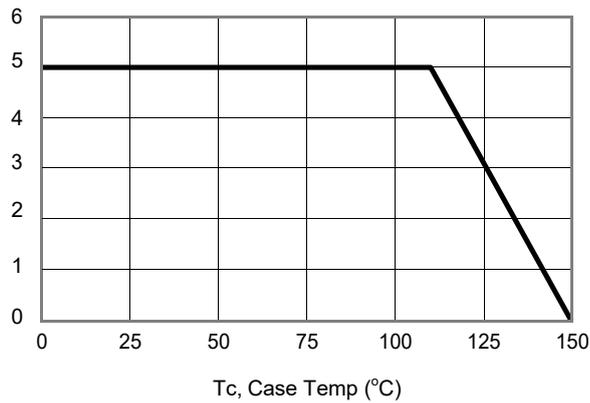


Typical Reverse Current

Typical Junction Capacitance

## PACKAGE OUTLINE DIMENSIONS


### DO-201AD

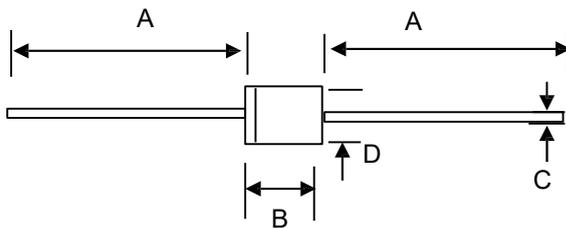

### DO-201AD mechanical data

UNIT		A	B	C	D
mm	max	26.5	9.5	1.4	5.3
	min	24.5	7.3	1.1	4.8
mil	max	1043.30	374.01	55.12	208.67
	min	946.57	287.40	39.37	188.97

Cathode

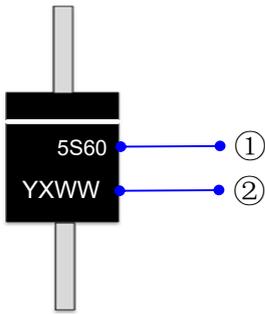

Anode

Product model : TSA


PDC information

Y X WW

WW:Week code(01 to 53)

X:Internal identification code

Y:Year code(ex:0=2020)

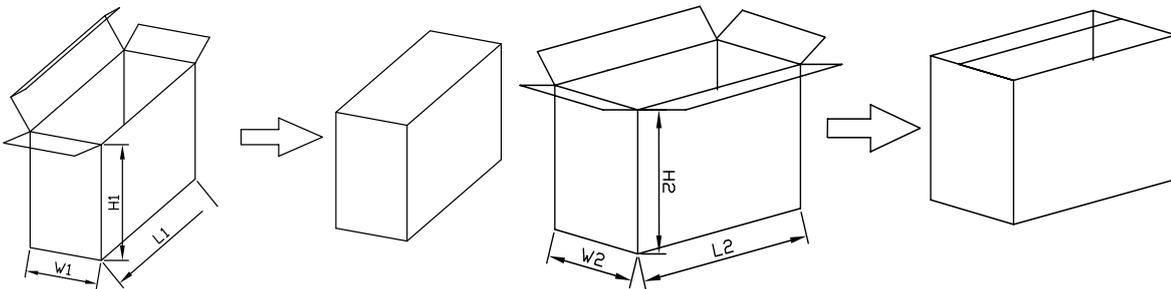

				4	4		