

TS \$3L

19-NOV-201 SD 11H

7 U H Q F K 0 2 6 % D U U L H U 6 F K R W W N \ 5 H

Features

‡ \$ G Y D Q W H G W F K K Q R O I
 ‡ / R Z I R U Z D R G V G D J R S
 ‡ / R Z S R Z D R V V H V
 ‡ + L J K I I L F L R S F U D W L R C
 ‡ / H D J G H H L Q L S R K + & R P S C

Applications

‡ ' & ' & R Q Y H
 ‡ \$ & ' & G D S W

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)






3 D U D P H W H U	6 \ P E R	/ L P L W	8 Q L
0 D [L P X P H S H V S H W L Y Y H Y R / O W D J H	9 5 5 0		9
0 D [L P X P Y H U D R J H Z D W G W F X I U H G I Q W 3 H D N) \$ 9		\$

1 R W H V

3 X O W H H V W V S X O Z I H G W K G X W \ F

3 X O W H H 3 X O Z I H G O V K P V

RATINGS AND CHARACTERISTICS CURVES

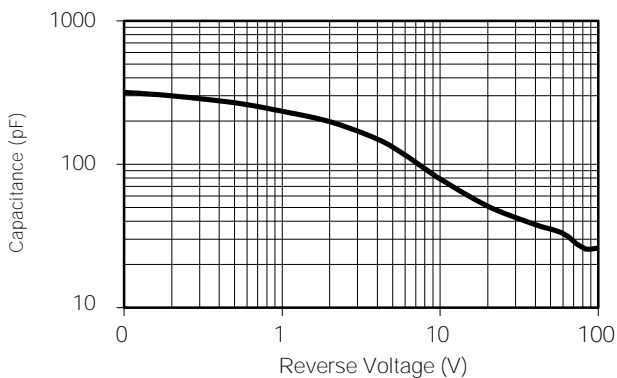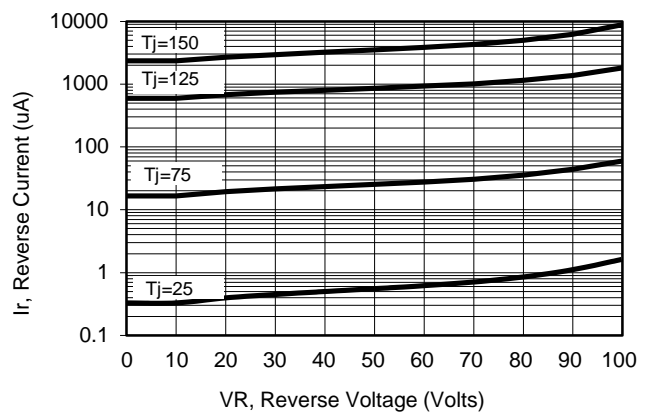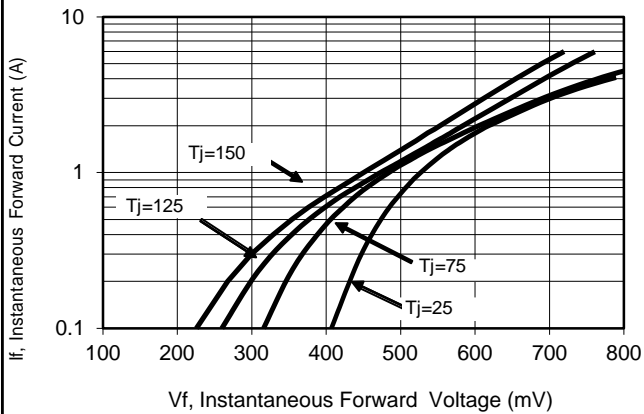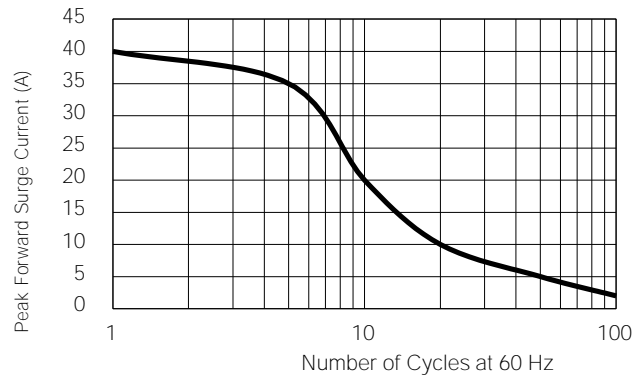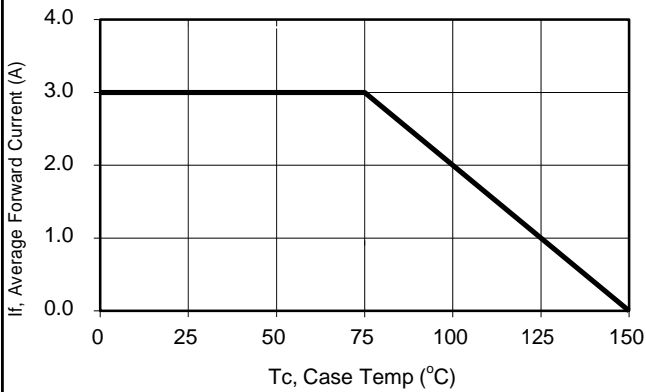

PACKAGE OUTLINE

'2 GLPHQVLRQV

